


SCip 3 Way Button

STPB-3

Installation guide



For use with:



Universal Receiver




SCD™ series



SCD mini™ series

- Long battery life
- Two way communication
- Wide operating temperature span
- No electro-mechanical switches (Reed relay based)
- Tough IP 65 ABS enclosure for harsh environments





ACTIVATION

1. Remove the buttons:

By loosening the 4 screws.

2. Activate the battery:



Move the jumper from "OFF" to "ON" position to activate the battery.

3. Mount on wall/surface:

Mount the bottom part on the desired wall/surface with 4 screws, notice the orientation.


4. Mount the buttons part:

The unit is now ready for pairing with receiving part (step 1).

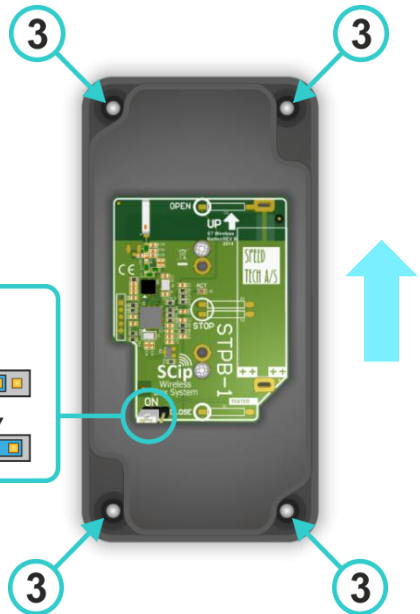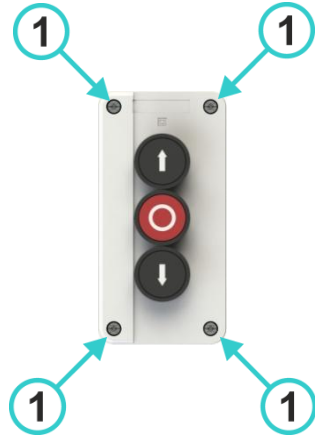

ADD TO A UNIVERSAL RECEIVER

Repeat the below steps to add the Push Button 3 to a Universal Receiver:



1. Activate programming mode



Press setup/reset once

2. Select output



Press setup/reset multiple times to select the desired output

3. Add



Press and hold up and down for at least 10 seconds

4. Deactivate programming mode



Press setup/reset multiple times to select the ! LED (Or wait approx. 30 seconds)

For pairing with a SCD/SCD mini

- See next page →

For further information please refer to the Universal Receiver manual.

Icon description:



Single press



Press and hold for more than 1 second



Press and hold for more than 10 seconds



Press to step one or more



Internal beeper audible feedback



Lamp flashing





Lamp lit



Activate SCip client

ADD TO A SCD OR SCD MINI

Repeat the below steps to add Push Button 3 to a SCD eller SCD mini:

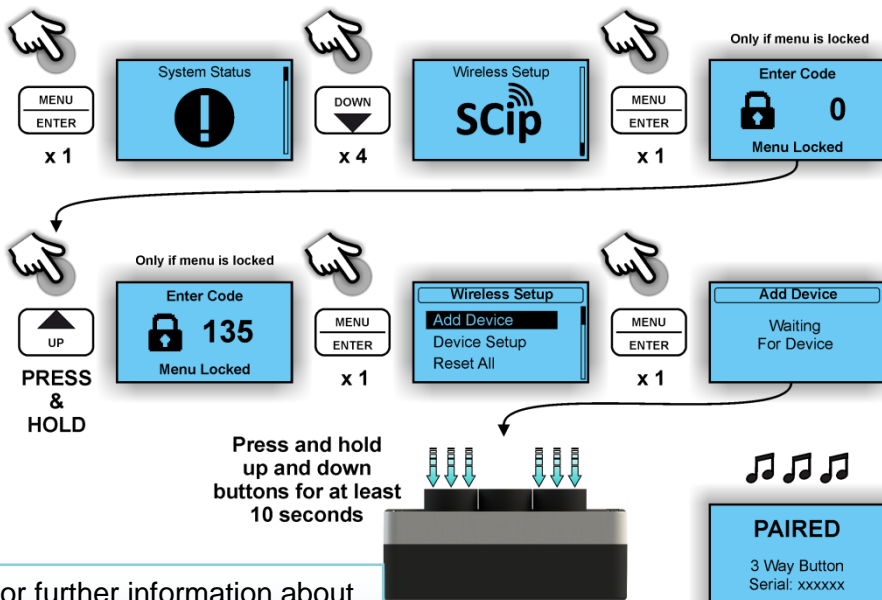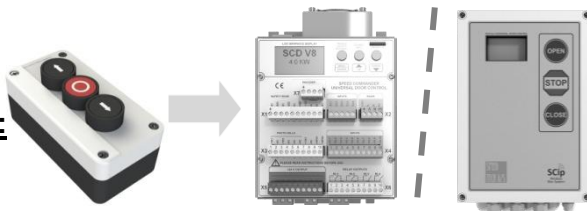

For further information about functionality etc. please refer to the SCD / SCD Mini installation guide.

Technical data:

Range (indoor)	15m
Network type/frequence:	2.4GHz ISM band
Temperature range:	-20 to +40°C
Power supply	Battery, Lithium 3.6V (AA/FR6)
Ingress protection class:	65
Dimensions:	Outer dimensions: 135 x 68 x 80mm (H x B x D)
	Mounting holes: 6 x 4.3mm (slotted holes)
	- See the bottom of the product for further details
Weight:	220g